


Schematic:



Electrical Specifications @25°C





- Turns Ratio:
1-3 : 4-5 : 9-6 : 10-7 = 2.67 : 1 : 1 : 1
- Inductance:
1-3: 48uH $\pm 10\%$
- DC Resistance:
1-3 = 62m Ω MAX
9-6 = 20m Ω MAX
10-7 = 23m Ω MAX
4-5 = 120m Ω MAX
- Leakage Inductance:
1-3: 0.67uH MAX. (10, 9, 6, 7, 4, 5) shorted.
- Hipot:
Pri to Sec: 2250Vdc
- Operating Temperature Range: -40°C ~ +130°C.

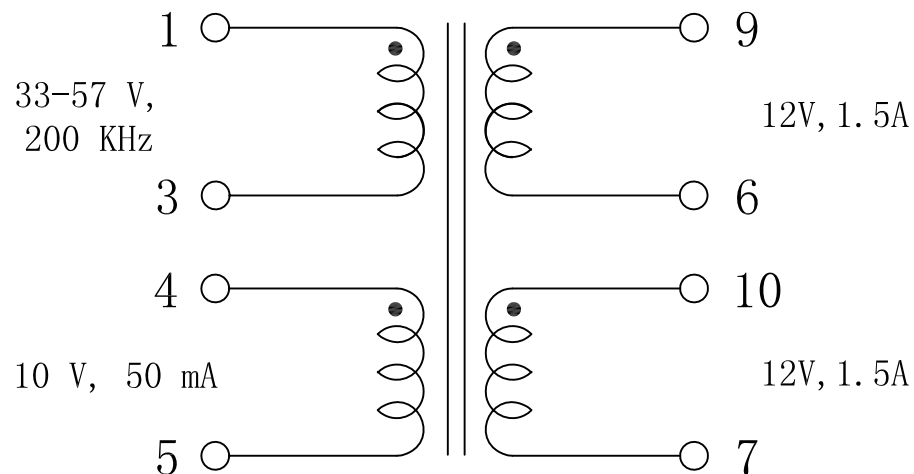

X:X	APPD:	LINK-PP INT'L TECHNOLOGY CO., LIMITED	
X:XX ± 0.25	CHKD:		
X:XXX	DR: TOM	TITLE: Flyback Transformer	
ANGLES $\pm 1^\circ$	UNIT: mm	PART NO.: LPA2307ANL	
	SCALE: 2/1	SHEET: 1/2	REV: A DWG: LP17021416

Mechanical:

REV.	ECN NO.	DESCRIPTION	DATE	APPD
A	REL		2017-02-14	

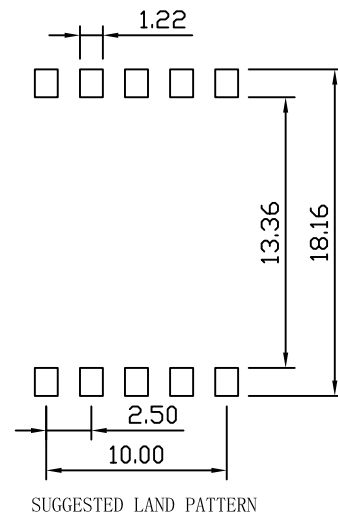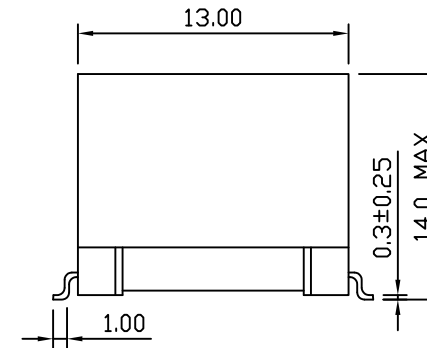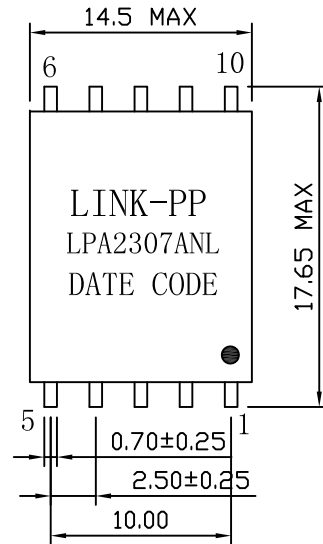

NOTES:

- 1.High Frequency Wire Wound Transformers
- 2.Power Range: up to 70W.
- 3.Assembly must be RoHS compliant.
- 4.Maximun reflow temperature is 250°C,5 Sec.
- 5.UL certification: file number E484635.



X:X	APPD:	LINK-PP INT'L TECHNOLOGY CO., LIMITED		
X:XX ±0.25	CHKD:	TITLE: Flyback Transformer		
X:XXX	DR: TOM	PART NO.: LPA2307ANL		
ANGLES ±1°	UNIT: mm			
	SCALE: 2/1	SHEET: 1/2	REV: A	DWG: LP17021416