


Schematic:

REV.	ECN NO.	DESCRIPTION	DATE	APPD
A	REL		2012-08-14	

PC BOARD CONNECTIONS

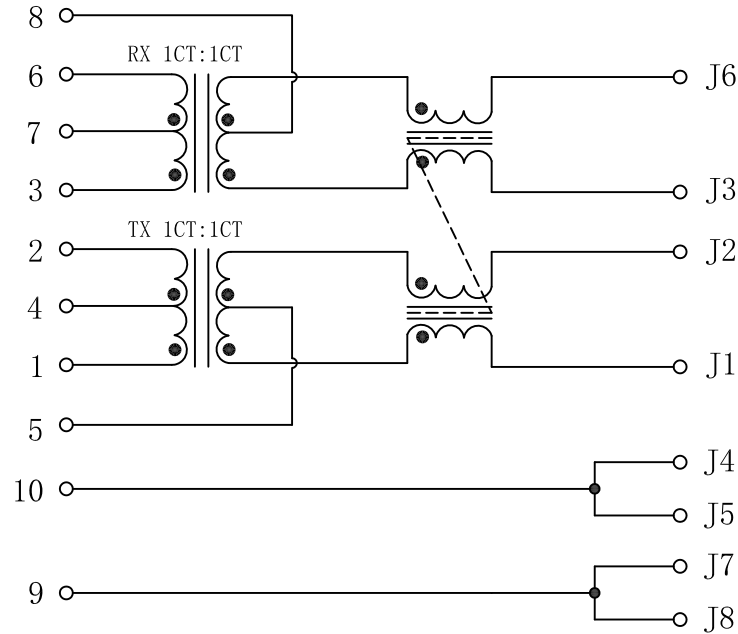



RJ45 CONNECTOR

ELECTRICAL SPECIFICATIONS @25°C

- Turn Ratio(±5%):  
TX=1CT:1CT      RX=1CT:1CT
- Inductance OCL: 350uH MIN  
@100KHz, 0.1V, 8mA DC Bias
- Insertion Loss:  
-1.2dB MAX @1-100MHz
- Return Loss:  
-16dB MIN @1-30MHz  
-14dB MIN @40MHz  
-13dB MIN @50MHz  
-12dB MIN @60-80MHz
- Cross talk:  
-43dB MIN @30MHz  
-37dB MIN @60MHz  
-33dB MIN @100MHz
- DCMR:  
-50dB MIN @30MHz  
-43dB MIN @60MHz  
-35dB MIN @100MHz
- Hipot: 1500Vrms MIN
- Operating Temperature: 0°C TO 70°C.






Emitting Color	$\lambda_p$ (nm)	VF@IF=20mA	IR @VR=5V
GREEN	565	1.8~2.6V	10 $\mu$ A max
YELLOW	585	1.8~2.6V	10 $\mu$ A max



X:X ±0.30	APPD:	LINK-PP INT'L TECHNOLOGY CO., LIMITED
X:XX ±0.25	CHKD:	
X:XXX ±0.05	DR: TOM	TITLE: RJ45 Connector with 10/100 Base-T Integrated Magnetics For PoE+ Application
ANGLES ±1°	UNIT: mm	PART NO.: LPJ0514HENL
	SCALE: 2/1	SHEET: 1/2
	REV: A	DWG NO.: LP12081435



# Mechanical:

REV.	ECN NO.	DESCRIPTION	DATE	APPD
A	REL		2012-08-14	

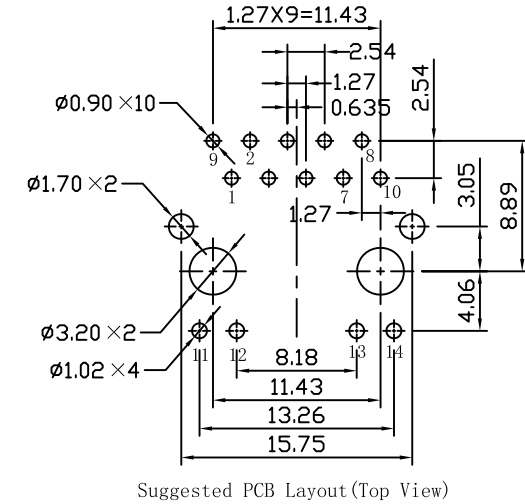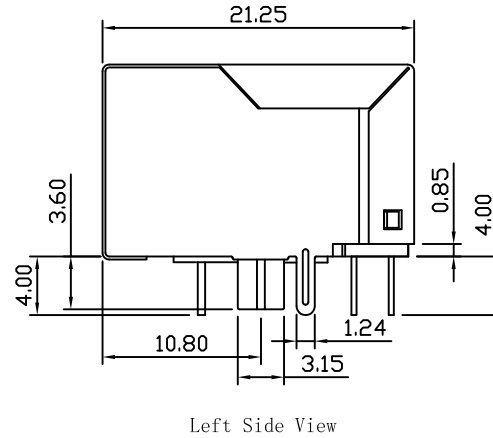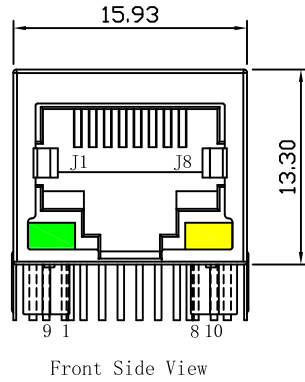

## NOTES:

1. Designed to support application, such as SOHO (ADSL modems), LAN-on-Motherboard (LOM), hub and Switches.
2. Designed for PoE+, IEEE802.3at applications
3. PoE applications current capability: 600mA.
4. Connector Materials:  
 Housing: Thermoplastic PBT+30%G.F UL94V-0  
 Contact: Phosphor Bronze C5210R-EH Thickness=0.35mm  
 Pins: Brass C2680R-H Thickness=0.35mm  
 Shield: SUS 201-1/2H Thickness=0.2mm  
 Contact plating: Gold 6 micro-inches min. In contact area.
5. Wave solder tip temperature: 265°C Max, 5 Sec.
6. UL Certification: File Number E484635.

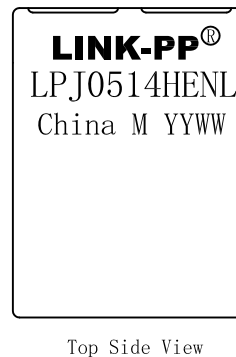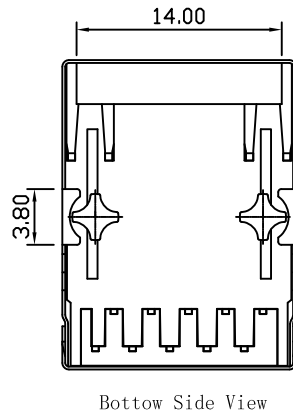

X:X ±0.30	APPD:	LINK-PP INT'L TECHNOLOGY CO., LIMITED
X:XX ±0.25	CHKD:	
X:XXX ±0.05	DR: TOM	TITLE: RJ45 Connector with 10/100 Base-T Integrated Magnetics For PoE+ Application
ANGLES ±1°	UNIT: mm	PART NO.: LPJ0514HENL
	SCALE: 2/1	SHEET: 2/2
	REV: A	DWG NO.: LP12081435