
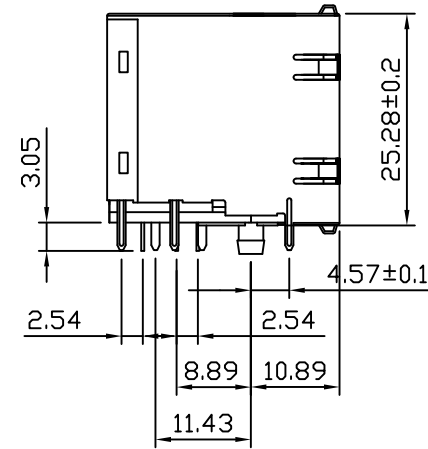




Mechanical:

REV.	ECN NO.	DESCRIPTION	DATE	APPD
A	REL		13/03/2009	

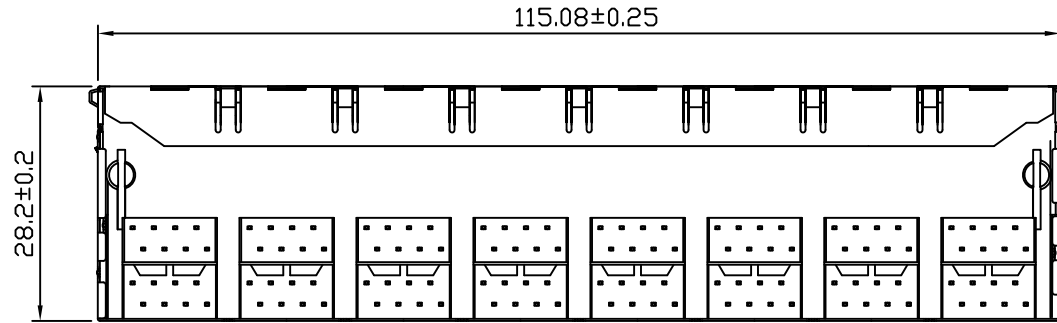

LPJE100XCNL

Gold Plating	"X"
1.5U"	1 <input type="checkbox"/>
3U"	2 <input type="checkbox"/>
6U"	3 <input type="checkbox"/>
15U"	4 <input type="checkbox"/>
30U"	5 <input type="checkbox"/>
50U"	6 <input type="checkbox"/>

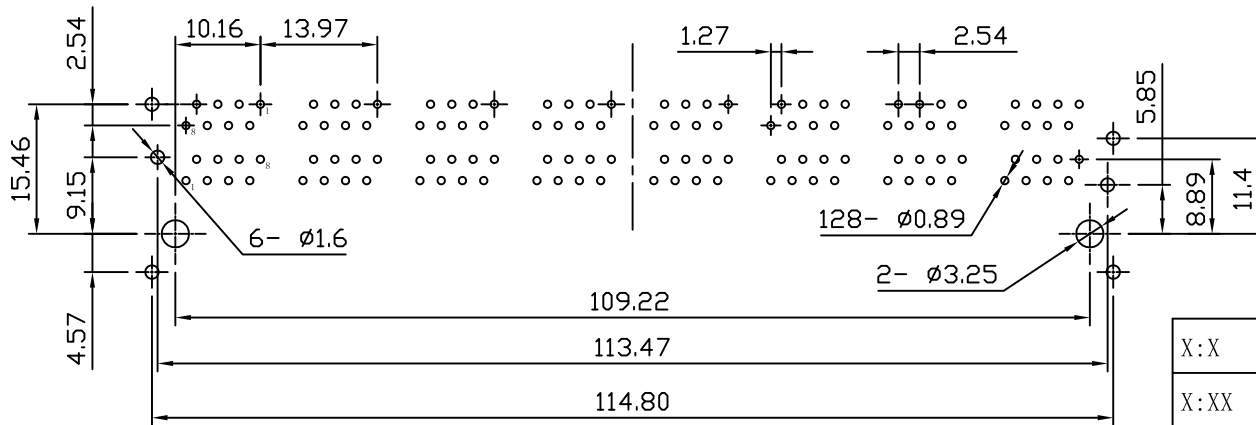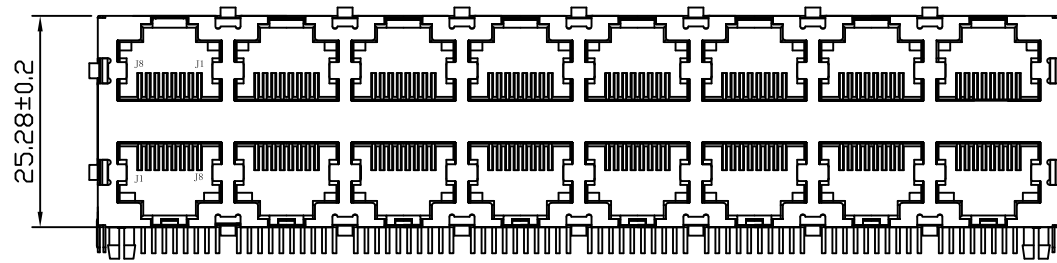

NOTES:

Electrical:

- Voltage rating : 125 VAC RMS
- Current Rating : 1.5 AMP
- Contact resistance : 50 mΩ Max
- Insulation resistance : 500 MΩ Min @500V DC
- Dielectric strength : 1500 VAC RMS 60Hz, 1MIN.

MECHANICAL:

- Housing & Insert Material : PBT UL94V-0.
- Contact Material : Diameter 0.46mm Phosphor Bronze
Gold Plating Over Nickel.
- Shield : 0.20-0.25mm Thickness Brass
With tin Plated
- Operating Life : 750 Cycles Min.

ENVIRONMENTAL:

- Storage : -40°C ~ +85°C
- Operation : -40°C ~ +85°C.
- Wave solder temperature : 265°C 5 Sec MAX
- UL Certification : File Number E484635.



X:X ±0.30	APPD:	LINK-PP INT'L TECHNOLOGY CO., LIMITED
X:XX ±0.25	CHKD:	
X:XXX ±0.05	DR: TOM	TITLE: SIDE ENTRY PCB JACK WITH SHIELD & 2×8
ANGLES ±1°	UNIT: mm	PART NO.: LPJE100XCNL
	SCALE: 2/1	SHEET: 1/1
	REV: A	DWG NO.: LP09031305