Mechanical:

REV.	DESCRIPTION	APPD.	DATE
A	ISSUE	Victor	24/12'12

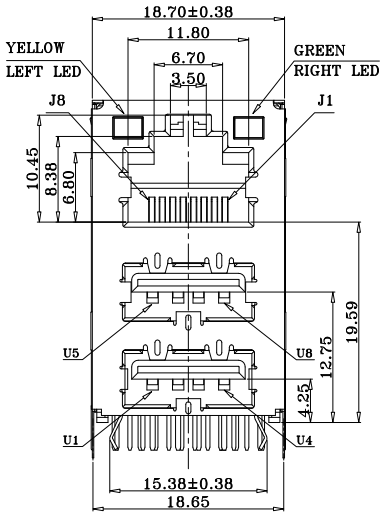

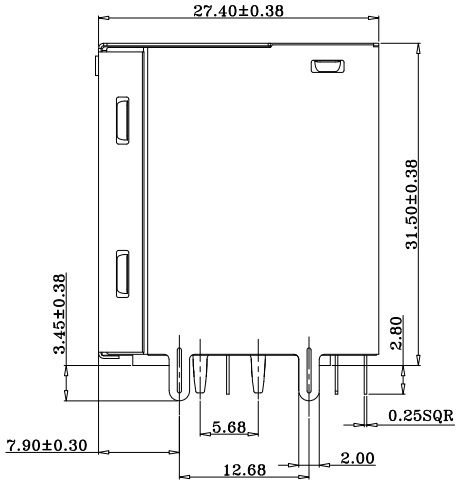

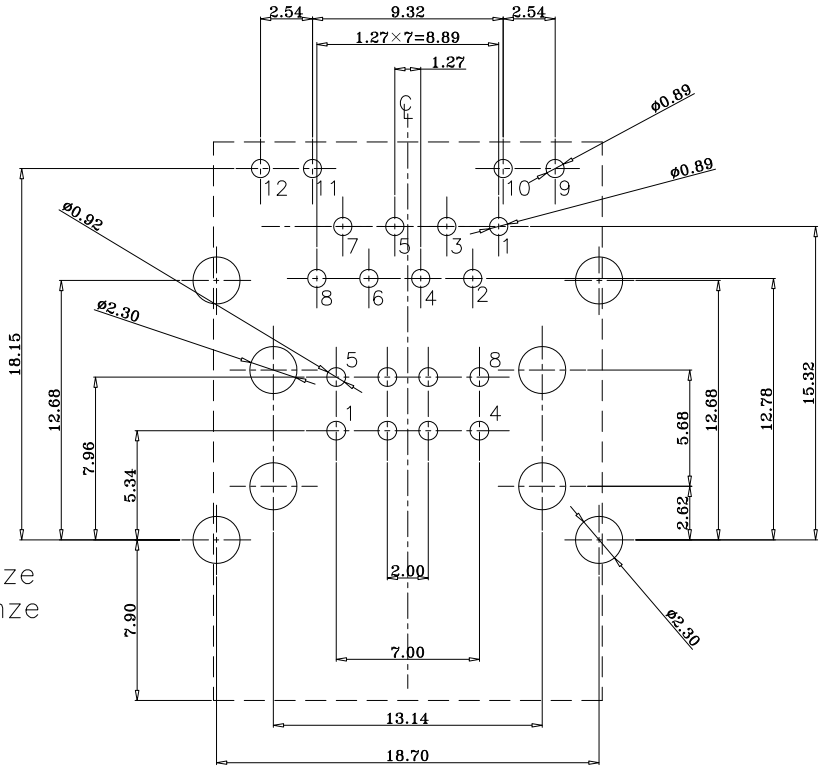

RECOMMENDED P.C.B LAYOUT(PCB THICKNESS: 1.6mm)

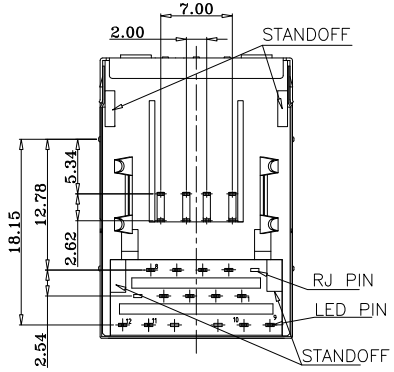

1.Material
HOUSING:PBT 30%G.F., BLACK, UL94V-0
RJ Contact : T=0.25mm Phosphor Bronze
USB Contact: T=0.30mm Phosphor Bronze
Shielded:
Front&Back shell: Stainless Steel
2. PLATING :
Contact area: Fu" Gold
Solder area : 80u"Matte Tin
Underplating :30u"Nickel over all





RoHS Compliant

UNSPECIFIED TOLERANCE:			
.X± 0.35	X°.± 3°	LINK-PP	
.XX± 0.25	.X° ± 2°	LINK-PP INT'L TECHNOLOGY CO.,LIMITED	
.XXX±0.15	.XX° ± 1°	APPD: LEO 25/12'12	TITLE: RJ45 JACK+USB2.0, W/LED
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ALL BEST ELECTRONICS TECHNOLOGY CO.,LTD. AND SHALL NOT BE REPRODUCED COPIED OF USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ALL BEST ELECTRONICS TECHNOLOGY CO.,LTD.		CHKD: JACK 24/12'12	
		DR: TOM 24/12'12	PART NO. LPJE302BGNL

SCALE	SHEET	UNITS	REV.
1:1	1/1	mm	A0