



Mechanical:


REV.	ECN NO.	DESCRIPTION	DATE	APPD
A	REL		2013/02/06	

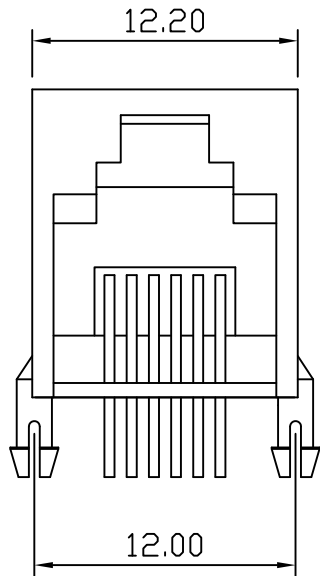


Front Side View

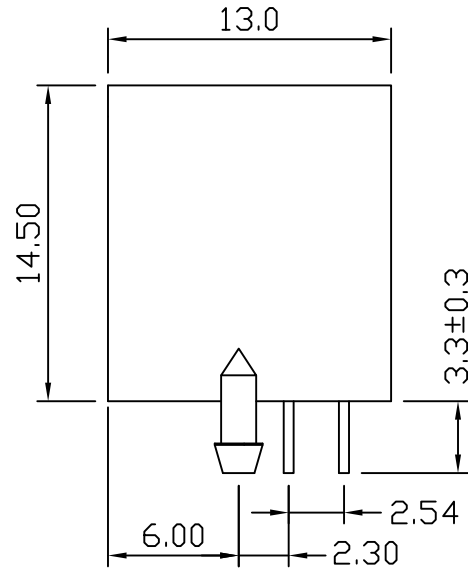

Left Side View



Bottom Side View

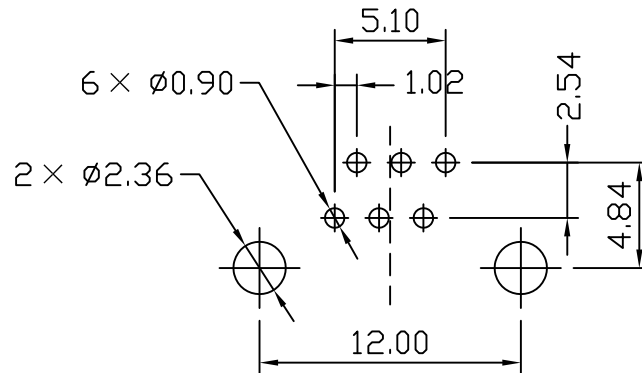

Suggested PCB Layout (Top View)

MATERIAL:

1. HOUSING: PA46, UL-94V-0, COLOR: Offwhite
2. CONTACT WIRE: 0.46MM DIAMETER PHOSPHOR BRONZE GOLD PLATING OVER NICKEL
3. DURABILITY: 1000 MATING CYCLES MINI
4. UL Certification: File Number E484635.

ELECTRICAL:

1. CURRENT RATING : 1.5A
2. VOLTAGE RATING : 125VACRMS
3. CONTACT RESISTANCE : 20MΩ MAX
4. INSULATION RESISTANCE : 500MΩ MIN @500VDC
5. WITHSTANDING VOLTAGE : 1000V AC FOR 1min.
6. GOLD PLATING
7. (1) STORAGE: -40°C to +85°C
(2) OPERATION: -40°C to +85°C
(3) WAVE SOLDER TEMPERATURE: 265°C, 5~10 SEC.



X:X ±0.30	APPD: James	LINK-PP INT'L TECHNOLOGY CO., LIMITED
X:XX ±0.25	CHKD:	
X:XXX ±0.10	DR: TOM	TITLE: Rj11 6P6C Socket un-Shielded, THT
ANGLES ±1°	UNIT: mm	PART NO. : LPJE8014NNL
	SCALE: 2/1	SHEET: 1/1
	REV: A	DWG NO. : LP13201156