Mechanical:

REV.	ECN NO.	DESCRIPTION	DATE	APPD
A	REL		2023-02-10	

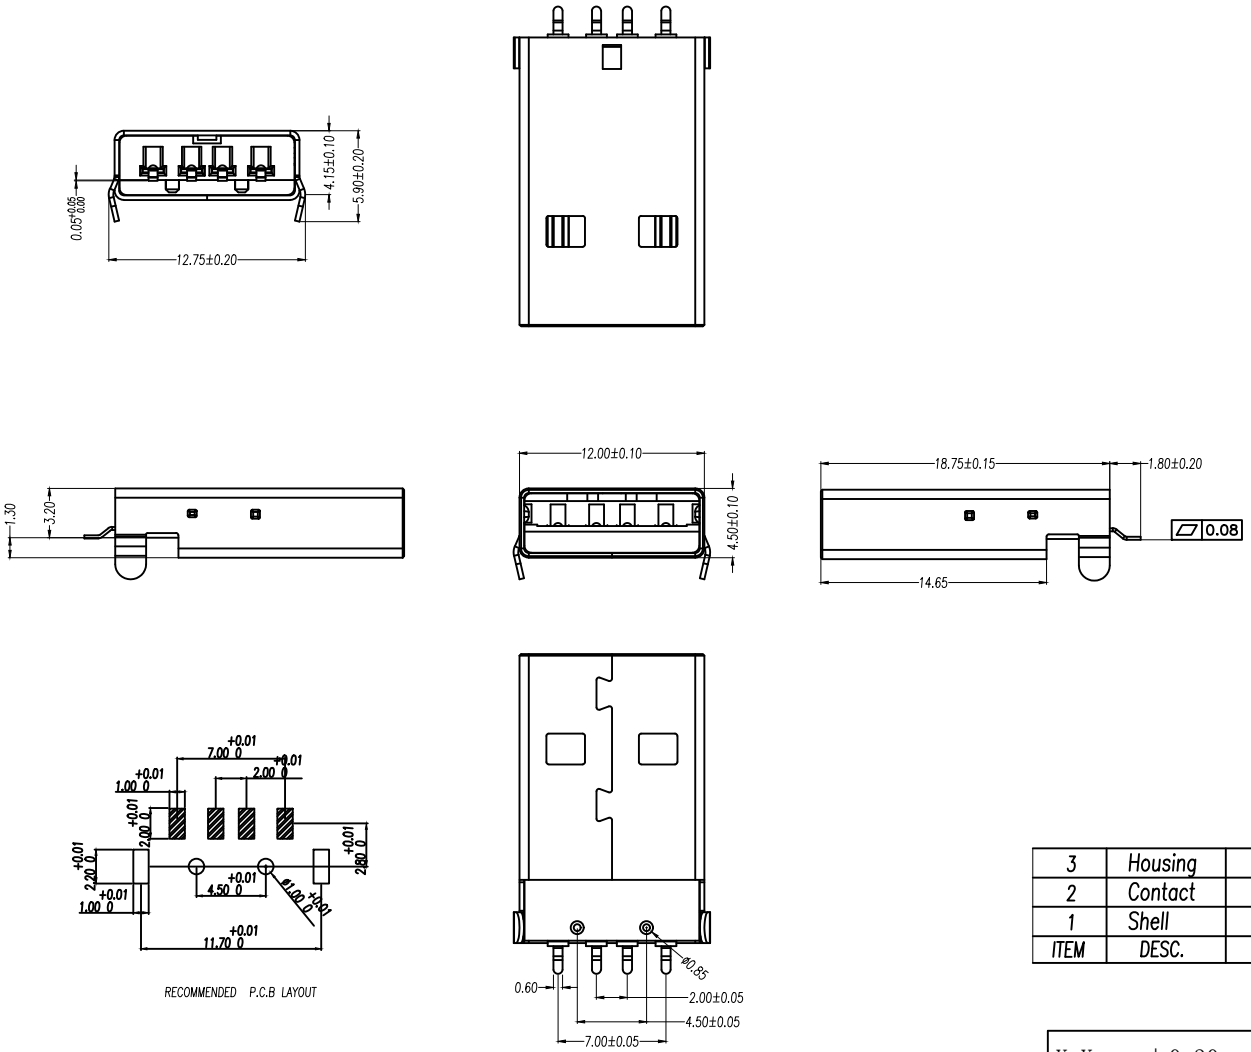

Specifications:
Electrical:
1. Current Rating :1.5A/contact terminal
2. Voltage Rating:30V DC
3. Contact Resistance:30 milliohms MAX
4. Dielectnic Withstanding Voitage:500 V AC AT Sea Levol
5. Lnsulation Resistance:1000MEGA ohms MIN
Mechanical:
1. Cnnector Mate and Unmate Force
   Mate force:3.57kgf(MAX) Unmate force:1.02kgf(MIN)
2. Terminal Retenion : 1.0kgf(MIN)
Matorial:
1. Housing:Hing Temperature Tnermaplastics, PBT\LCP White/Black
2. Contact:Copper Alloy C2680
3. Contact: Piated Gold in Mating Area; Tin On Solder Talls 50U" MIN
4. Shell:The copper case is surrounded by 80U"(MIN) tin Nickel Plating

ITEM	DESC.	MATERIAL	REMARKS	PART REMARKS
3	Housing	PBT		
2	Contact	C2680		
1	Shell	SPCC		

RoHS 2011/65/EU

X:X ±0.30	APPD: TOM	LINK-PP INT'L TECHNOLOGY CO., LIMITED	
X:XX ±0.25	CHKD: JAMES	TITLE: USB 2.0 AM 180° Bent Foot SMT	
X:XXX ±0.05	DR: LEO		
ANGLES ±1°	UNIT: mm	PART NO.: LPUSB1206	
SCALE: 2/1	SHEET: 1/2	REV: A	DWG NO.: LP23021007

LINK-PP Website: http://www.link-pp.com Email: info@link-pp.com Tel: +86-0752-3322916 Fax: +86-0752-3161926